




MV-V12E BEER NOZZLE

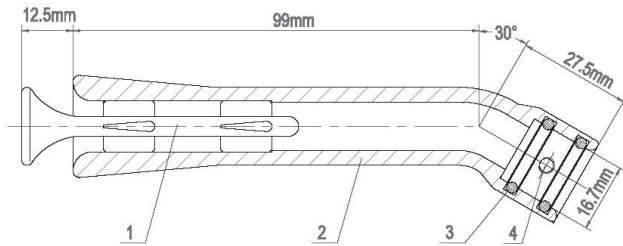


ITEM	PART NAME	MATERIAL
1	GUIDEVANE	CF8
2	BODY	CF8
3	O-RING	FPM
4	BOLT	304

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: beer



MV-V12F BEER FAUCET

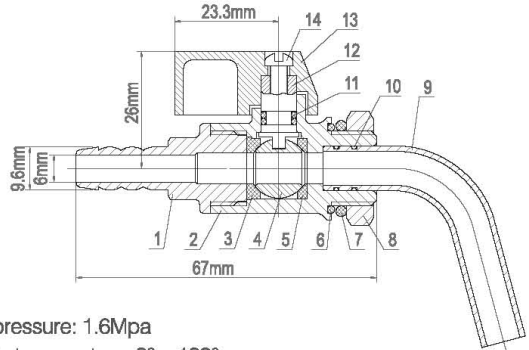


ITEM	PART NAME	MATERIAL
1	HOSE/CAP	CF8/CF8M
2	BODY	CF8/CF8M
3	BALL SEAT	RPTFE
4	BALL	CF8/CF8M
5	BALL SEAT	RPTFE
6	O-RING	FPM
7	O-RING	FPM
8	NUT	304/316
9	TUBE	314/316
10	O-RING	FPM
11	O-RING	FPM
12	STEM	304/316
13	HANDLE	AL
14	BOLT	304

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: beer, water, oil, gas



MV-V12G BEER FAUCET

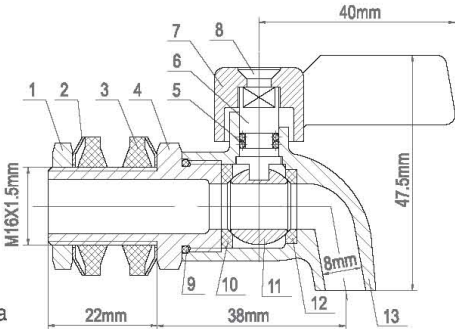


ITEM	PART NAME	MATERIAL
1	NUT	SUS304
2	STOPPER	SUS304
3	GASKET	FPM
4	CAP	CF8/CF8M
5	O-RING	FPM
6	STEM	304/316
7	HANDLE	CF8/CF8M
8	BOLT	304
9	O-RING	FPM
10	BALL SEAT	RPTFE
11	BALL	CF8/CF8M
12	BALL SEAT	RPTFE
13	BODY	CF8/CF8M

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: beer



MV-V12H WINE FAUCET

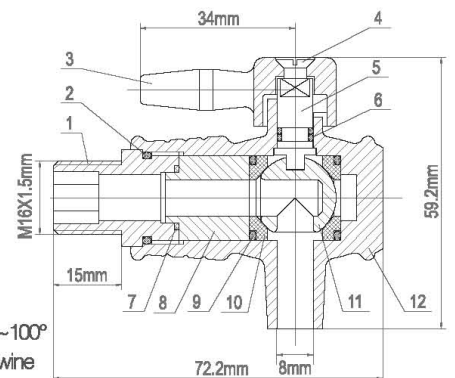


ITEM	PART NAME	MATERIAL
1	CAP	CF8/CF8M
2	CASKET	FPM
3	HANDLE	CF8/CF8M
4	BOLT	304
5	STEM	304/316
6	O-RING	FPM
7	O-RING	FPM
8	WASHER	304/316
9	O-RING	FPM
10	BALL SEAT	RPTFE
11	BALL	CF8/CF8M
12	BODY	CF8/CF8M

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: beer, wine



MV-V12I BEER FAUCET

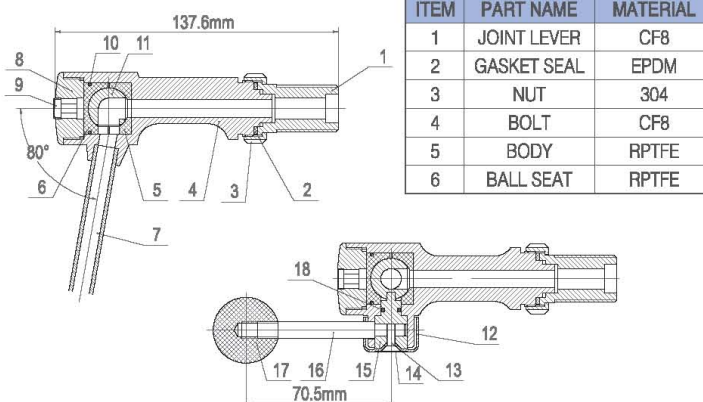

ITEM	PART NAME	MATERIAL
1	JOINT LEVER	CF8
2	GASKET SEAL	EPDM
3	NUT	304
4	BOLT	CF8
5	BODY	RPTFE
6	BALL SEAT	RPTFE

ITEM	PART NAME	MATERIAL
7	WINE OUTLET TUBE	304
8	CAP	CF8
9	DECORATIVE CAP	PLASTIC
10	O-RING	FPM
11	BALL	CF8
12	HANDLE CAP	CF8
13	BOLT	304
14	WASHER	304
15	STEM	304
16	HANDLE	304
17	HANDLE BALL	BAKELITE
18	O-RING	FPM

Stainless steel faucets & check valves



No.320247-US



 MAXVALUE INDUSTRIES CO., LTD.

MV-V7E Vertical Type Check Valve





from 1/4" to 1/2" type A



from 3/4" to 4" type A





from 1/4" to 4" type B

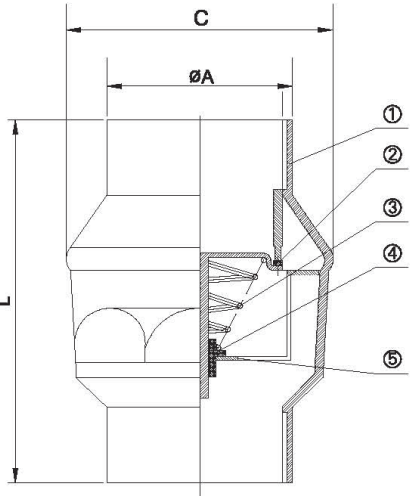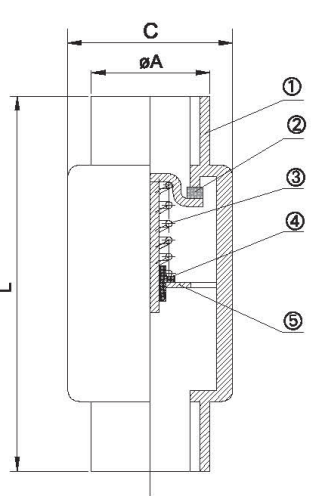

No.	NAME	MATERIAL
1	Valve Body	Stainless Steel
2	Seat Ring	Silicon
3	Spring	Stainless Steel
4	Holder	Teflon
5	Holder	Stainless Steel

SIZE	L		A	C
	typeA	typeB		
1/4"	54	66	18	40
3/8"	54	66	20	40
1/2"	54	66	25	40
3/4"	70	72	29	53
1"	84	83	36	53
1 1/4"	99	105	45	68
1 1/2"	119	115	51	72
2"	123	125	64	88
2 1/2"	147	145	80	100
3"	166	160	93	113
4"	193	180	120	139


Working Temperature: max 220°C

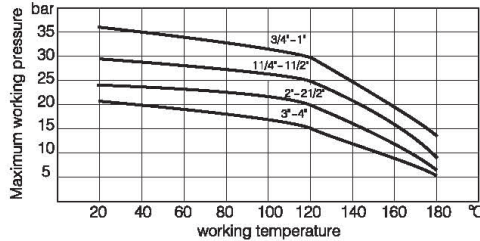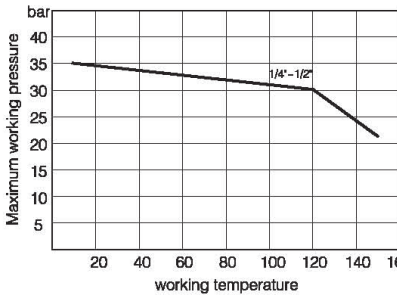

Weld End and Clamp End Available



MV-V12A-1
FAUCET (ITALY STYLE)

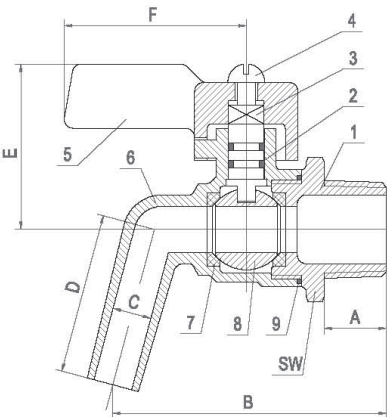


Unit:mm				
	3/8"	1/2"	3/4"	1"
A	10	13.5	15.5	17.5
B	56	59.5	76.5	78.5
C	8.5	8.5	14	14
D	35	35	40	40
E	36	36	40.8	40.8
F	40	40	40	40
SW	29	29	36	36

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: water, oil, gas

ITEM	PART NAME	MATERIAL
1	P	CF8/CF8M
2	O-RING	NBR
3	STEM	304/316
4	BOLT	304
5	HANDLE	CF8/CF8M
6	BODY	CF8/CF8M
7	BALL SEAT	RPTFE
8	BALL	CF8/CF8M
9	O-RING	NBR



MV-V12A-2 FAUCET

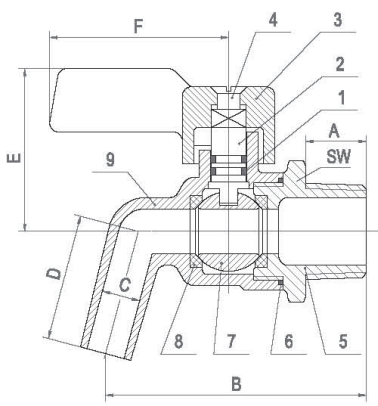

Unit:mm


	3/8"	1/2"
A	10	13.5
B	54.2	57.7
C	8.5	8.5
D	28	28
E	36	36
F	40	40
SW	29	29

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: water, oil, gas

ITEM	PART NAME	MATERIAL
1	O-RING	NBR
2	STEM	304/316
3	HANDLE	CF8/CF8M
4	BOLT	304
5	CAP	CF8/CF8M
6	O-RING	NBR
7	BALL	CF8/CF8M
8	BALL SEAT	RPTFE
9	BADY	CF8/CF8M



MV-V12B FAUCET

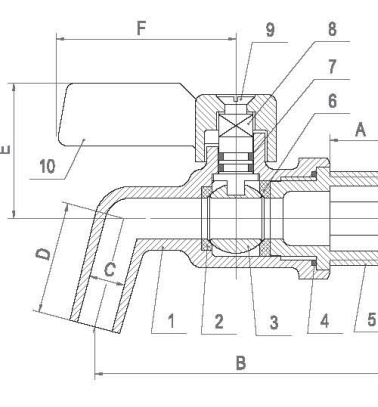


Unit:mm		
	3/8"	1/2"
A	11	13
B	63.5	65.5
C	8	8
D	25	25
E	30	30
F	40	40

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: water, oil, gas

ITEM	PART NAME	MATERIAL
1	BODY	CF8/CF8M
2	BALL SEAT	RPTFE
3	BALL	CF8/CF8M
4	O-RING	NBR
5	CAP	CF8/CF8M
6	BALL SEAT	RPTFE
7	O-RING	NBR
8	STEM	304/316
9	BALT	304
10	HANDLE	CF8/CF8M



MV-V12C
FAUCET WITH ROTATING HOSE

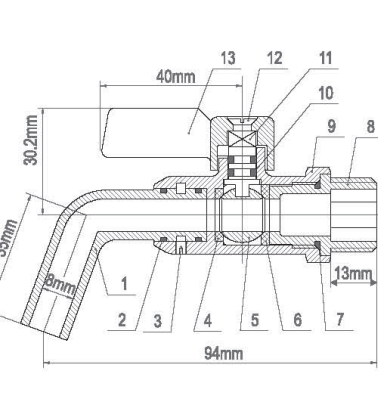


- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: water, oil, gas

ITEM	PART NAME	MATERIAL
1	ROTARY TUBE	CF8/CF8M
2	O-RING	NBR
3	BALT	304
4	BALL SEAT	RPTFE
5	BALL	CF8/CF8M
6	BALL SEAT	RPTFE
7	O-RING	NBR
8	CAP	CF8/CF8M
9	BODY	CF8/CF8M
10	O-RING	NBR
11	STEM	304/316
12	BALT	304
13	HANDLE	CF8/CF8M



MV-V12D BIBCOCK

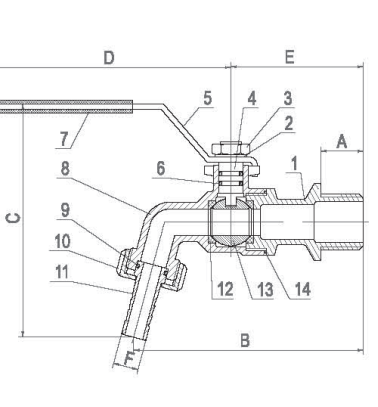

Unit:mm			
	1/2"	3/4"	1"
A	16	15	17
B	86.6	101	108
C	88	95	110
D	90	92	92
E	50	60	60
F	13	16	27.5

- Nominal pressure: 1.6Mpa
- Applicable temperature: 0° ~ 100°
- Applicable medium: water, oil

ITEM	PART NAME	MATERIAL
1	CAP	CF8/CF8M
2	WASHER	304
3	NUT	304
4	STEM	304/316
5	HANDLE	304
6	O-RING	NBR
7	HANDLE COVER	PLASTIC
8	BODY	CF8/CF8M
9	O-RING	NBR
10	NUT	CF8/CF8M
11	HOSE	304/316
12	BALL SEAT	RPTFE
13	BALL	CF8/CF8M
14	O-RING	NBR